


FOR ADDITIONAL INFORMATION SEE TEMPLATE NO. 10155 OR NO. 10169

NOTE: TYPE 161 STOCK HOLLOW METAL APPLICATIONS FOR 88 DEVICES WILL WORK ONLY ON THESE APPLICATIONS: SINGLE DOOR & 299, 299F OR 268 STRIKE. (5)

TYPE 161 STOCK HOLLOW METAL DOOR

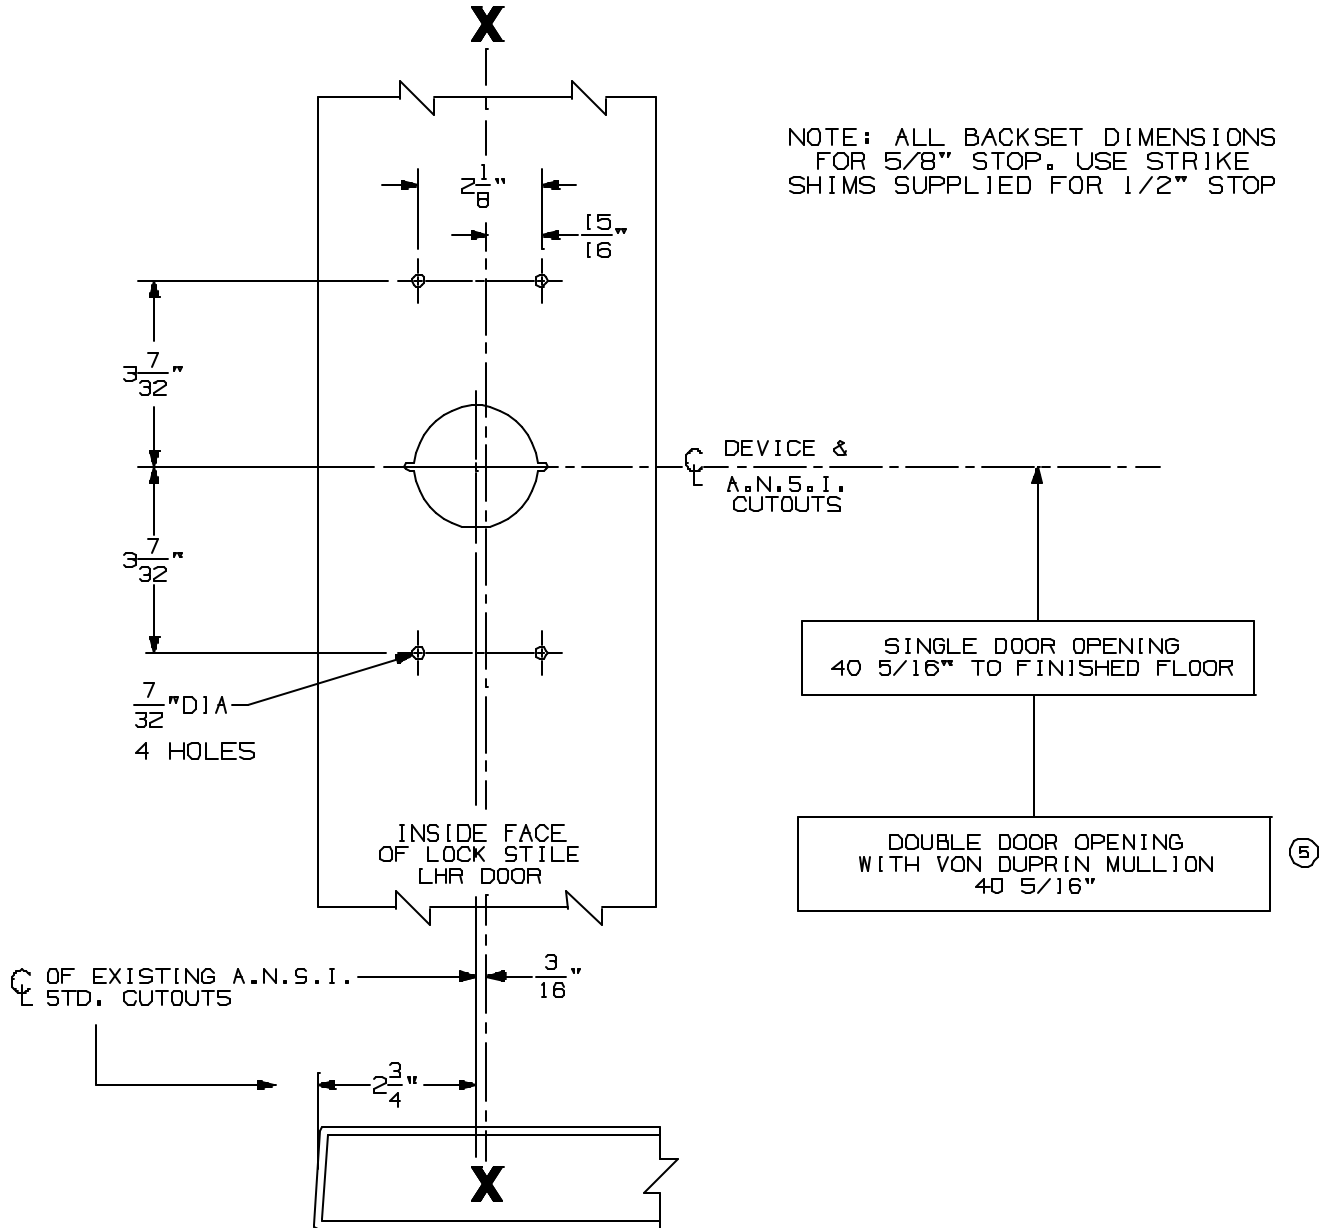

VON DUPRIN CUTOUTS ARE LOCATED FROM A.N.S.I. CUTOUTS SEE A.N.S.I. SPECIFICATION NO. A115 FOR THE SIZE AND LOCATION OF THESE CUTOUTS.

FOR OUTSIDE TRIM PREPARATION, WHEN REQUIRED, SEE ADDITIONAL TRIM TEMPLATE.

LHR SHOWN
RHR OPPOSITE

(5) 88E0 AND 88DT RIM DEVICES WITH 880 TRIM FOR TYPE "161" STOCK HOLLOW METAL APPLICATIONS	(5)
--	-----

NOTE:	TEMPLATE NUMBER: 10194_5	DATE: 4-30-98
-------	--------------------------	---------------