


FOR ADDITIONAL INFORMATION SEE TEMPLATE NO. 10156 OR NO. 10170

NOTE: TYPE 161 STOCK HOLLOW METAL APPLICATIONS FOR 88 DEVICES WILL WORK ONLY ON THESE APPLICATIONS: SINGLE DOOR & 299, 299F OR 268 STRIKE. (5)

TYPE 161 STOCK HOLLOW METAL DOOR

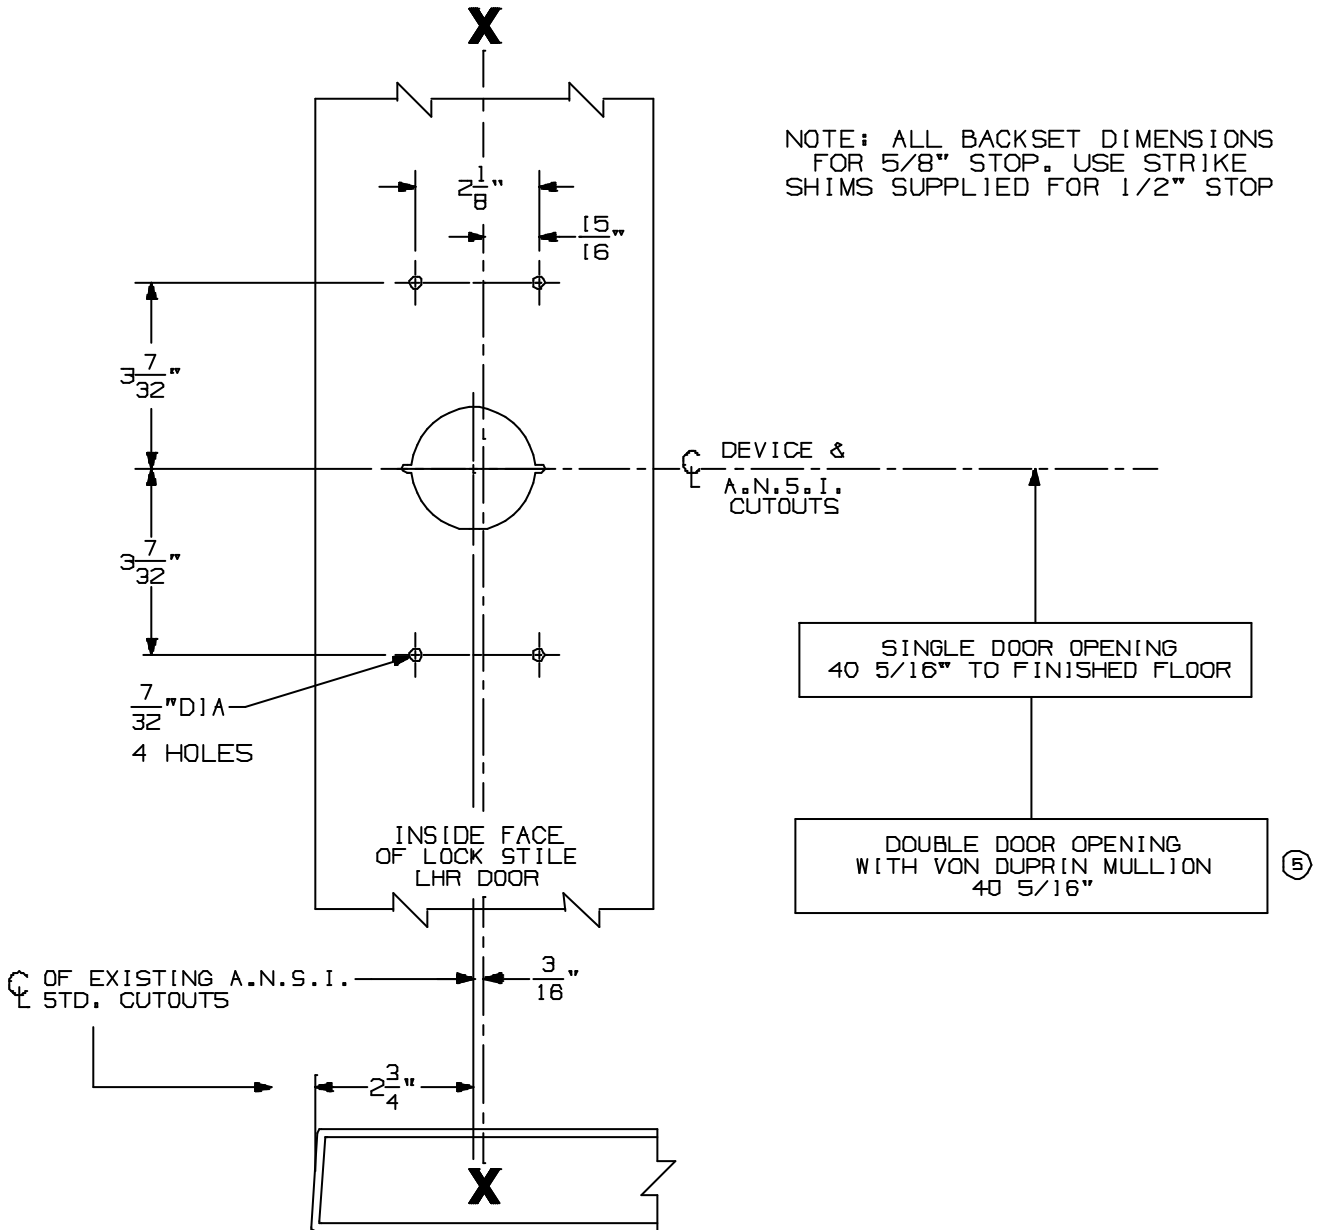

NOTE: ALL BACKSET DIMENSIONS FOR 5/8" STOP. USE STRIKE SHIMS SUPPLIED FOR 1/2" STOP

SINGLE DOOR OPENING  
40 5/16" TO FINISHED FLOOR

DOUBLE DOOR OPENING  
WITH VON DUPRIN MULLION  
40 5/16" (5)

VON DUPRIN CUTOUTS ARE LOCATED FROM A.N.S.I. CUTOUTS SEE A.N.S.I. SPECIFICATION NO. A115 FOR THE SIZE AND LOCATION OF THESE CUTOUTS.

LHR SHOWN  
RHR OPPOSITE

FOR OUTSIDE TRIM PREPARATION,  
SEE ADDITIONAL TRIM TEMPLATE.

(5)

BENL RIM DEVICE WITH 880 TRIM FOR  
TYPE "161" STOCK HOLLOW METAL APPLICATIONS



(5)

NOTE:

TEMPLATE NUMBER: 10195\_5

DATE: 4-30-99