


FOR ADDITIONAL INFORMATION SEE TEMPLATE NO. 10157 OR NO. 10171

NOTE: TYPE 161 STOCK HOLLOW METAL APPLICATIONS FOR 88 DEVICES WILL WORK ONLY ON THESE APPLICATIONS: SINGLE DOOR & 299, 299F OR 268 STRIKE.

⑤

TYPE 161 STOCK HOLLOW METAL DOOR

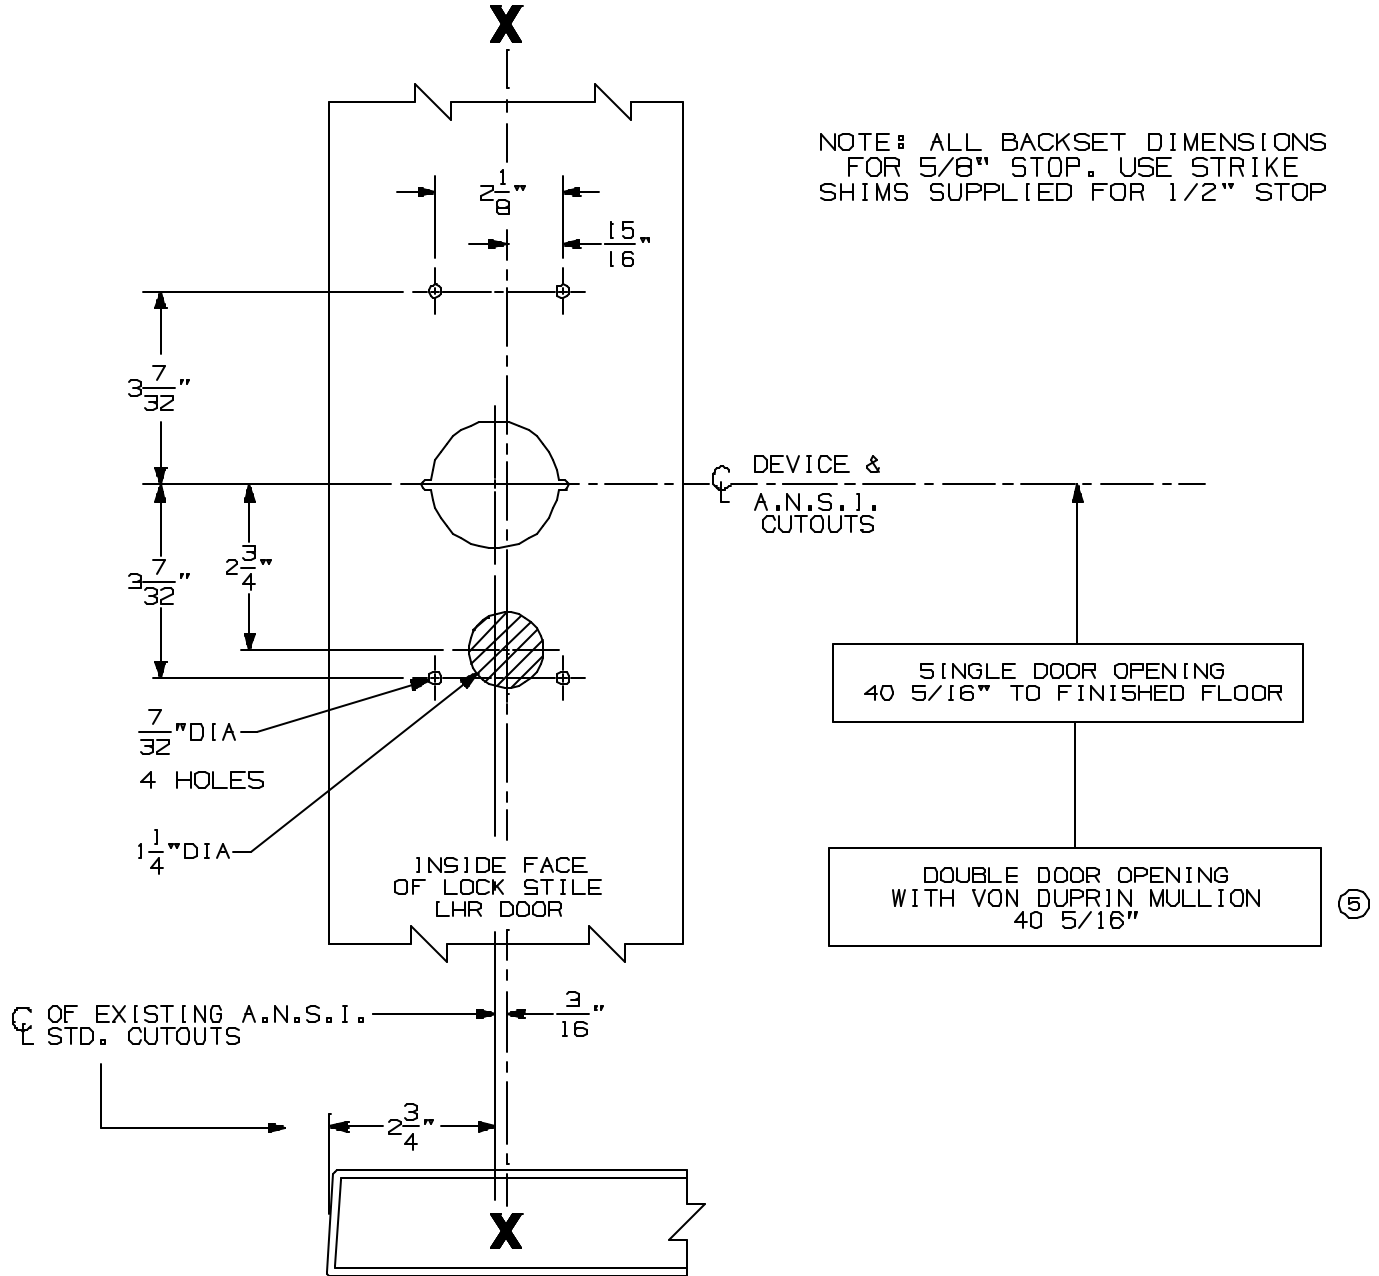

NOTE: ALL BACKSET DIMENSIONS FOR  $\frac{5}{8}"$  STOP. USE STRIKE SHIMS SUPPLIED FOR  $\frac{1}{2}"$  STOP

VON DUPRIN CUTOUTS ARE LOCATED FROM A.N.S.I. CUTOUTS SEE A.N.S.I. SPECIFICATION NO. A115 FOR THE SIZE AND LOCATION OF THESE CUTOUTS.

FOR OUTSIDE TRIM PREPARATION, SEE ADDITIONAL TRIM TEMPLATE.

LHR SHOWN RHR OPPOSITE

88TP RIM DEVICES WITH 880 TRIM FOR TYPE "161" STOCK HOLLOW METAL APPLICATIONS



NOTE:

TEMPLATE NUMBER: 10196\_5

DATE: 4-30-98