


FOR ADDITIONAL INFORMATION SEE TEMPLATE NO. 10158 OR NO. 10172

NOTE: TYPE 161 STOCK HOLLOW METAL APPLICATIONS FOR 88 DEVICES WILL WORK ONLY ON THESE APPLICATIONS: SINGLE DOOR & 299, 299F OR 268 STRIKE. (6)

TYPE 161 STOCK HOLLOW METAL DOOR

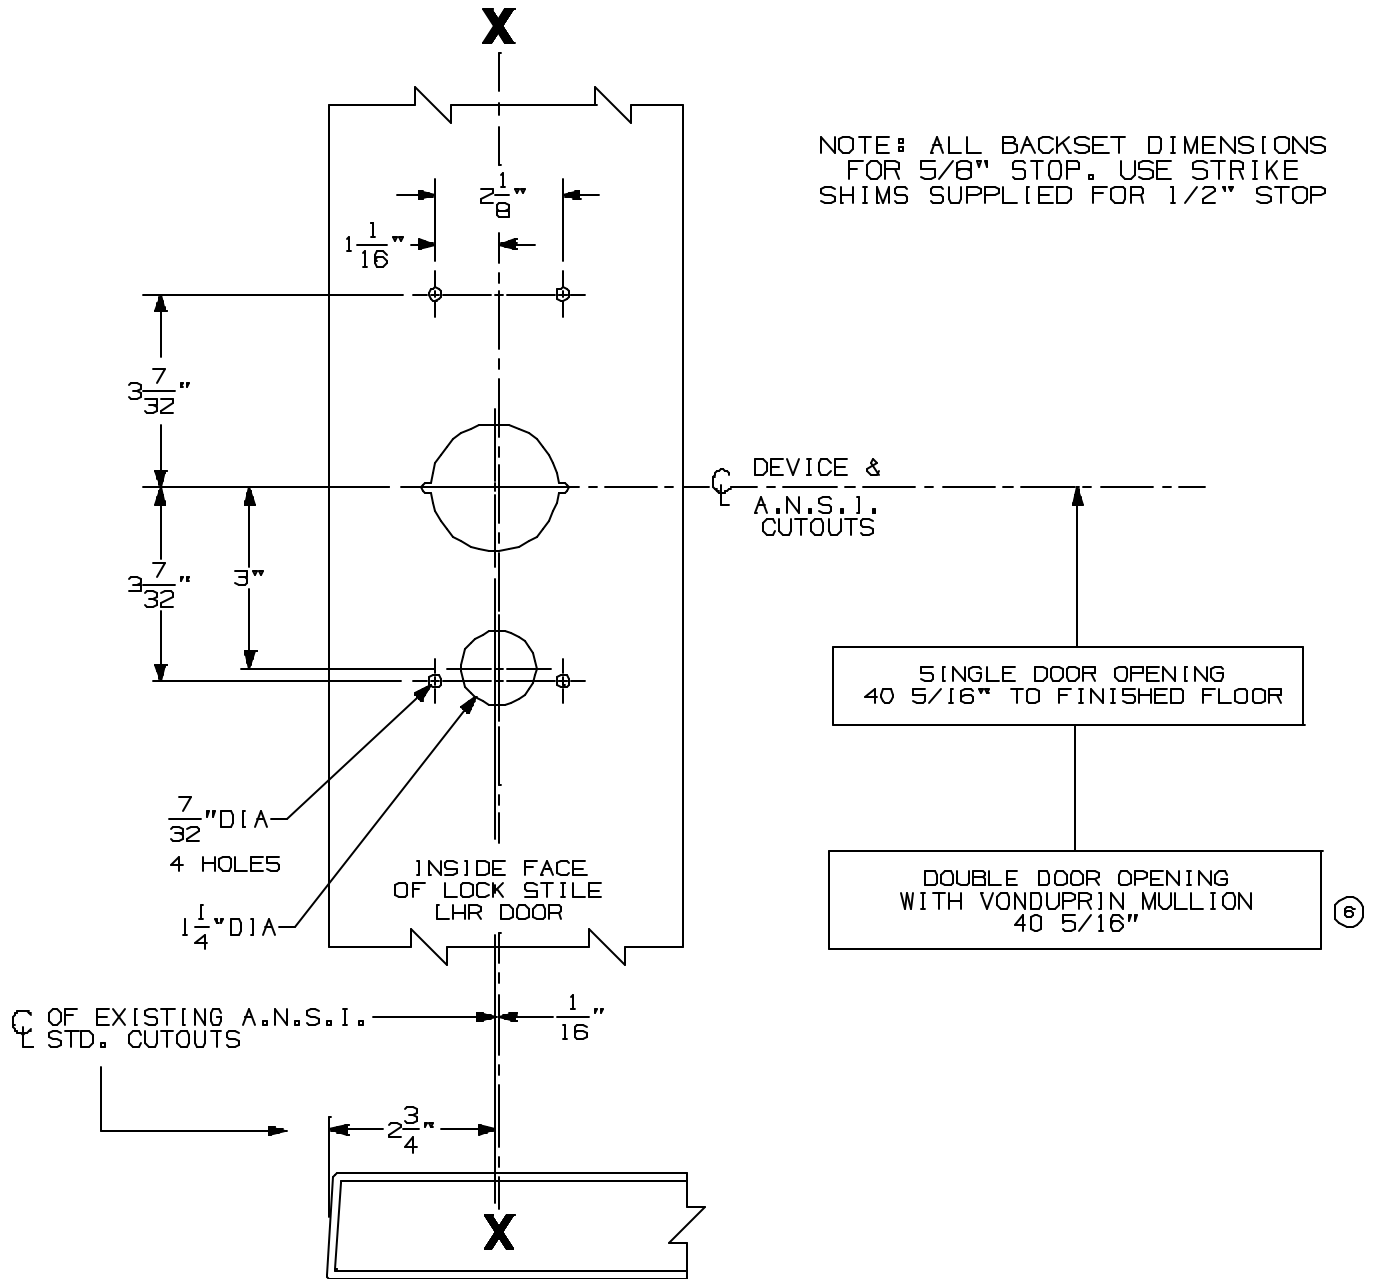

NOTE: ALL BACKSET DIMENSIONS FOR 5/8" STOP. USE STRIKE SHIMS SUPPLIED FOR 1/2" STOP

VON DUPRIN CUTOUTS ARE LOCATED FROM A.N.S.I. CUTOUTS SEE A.N.S.I. SPECIFICATION NO. A115 FOR THE SIZE AND LOCATION OF THESE CUTOUTS.

LHR SHOWN RHR OPPOSITE

FOR OUTSIDE TRIM PREPARATION, SEE ADDITIONAL TRIM TEMPLATE.

88K RIM DEVICES WITH 880 TRIM FOR TYPE "161" STOCK HOLLOW METAL APPLICATIONS (6)



NOTE:

TEMPLATE NUMBER:

10197_6

DATE: 3-19-98