


FOR ADDITIONAL INFORMATION SEE TEMPLATE NO. 10161

TYPE 161 STOCK HOLLOW METAL DOOR

TYPE 86 STOCK HOLLOW METAL DOOR & STD DOOR

NOTE: BACKSET IS ALWAYS 2 3/4".
SEX BOLTS REQUIRED FOR TOP & BOTTOM LATCH CASE 7/32 DIA INSIDE 3/8 DIA OUTSIDE

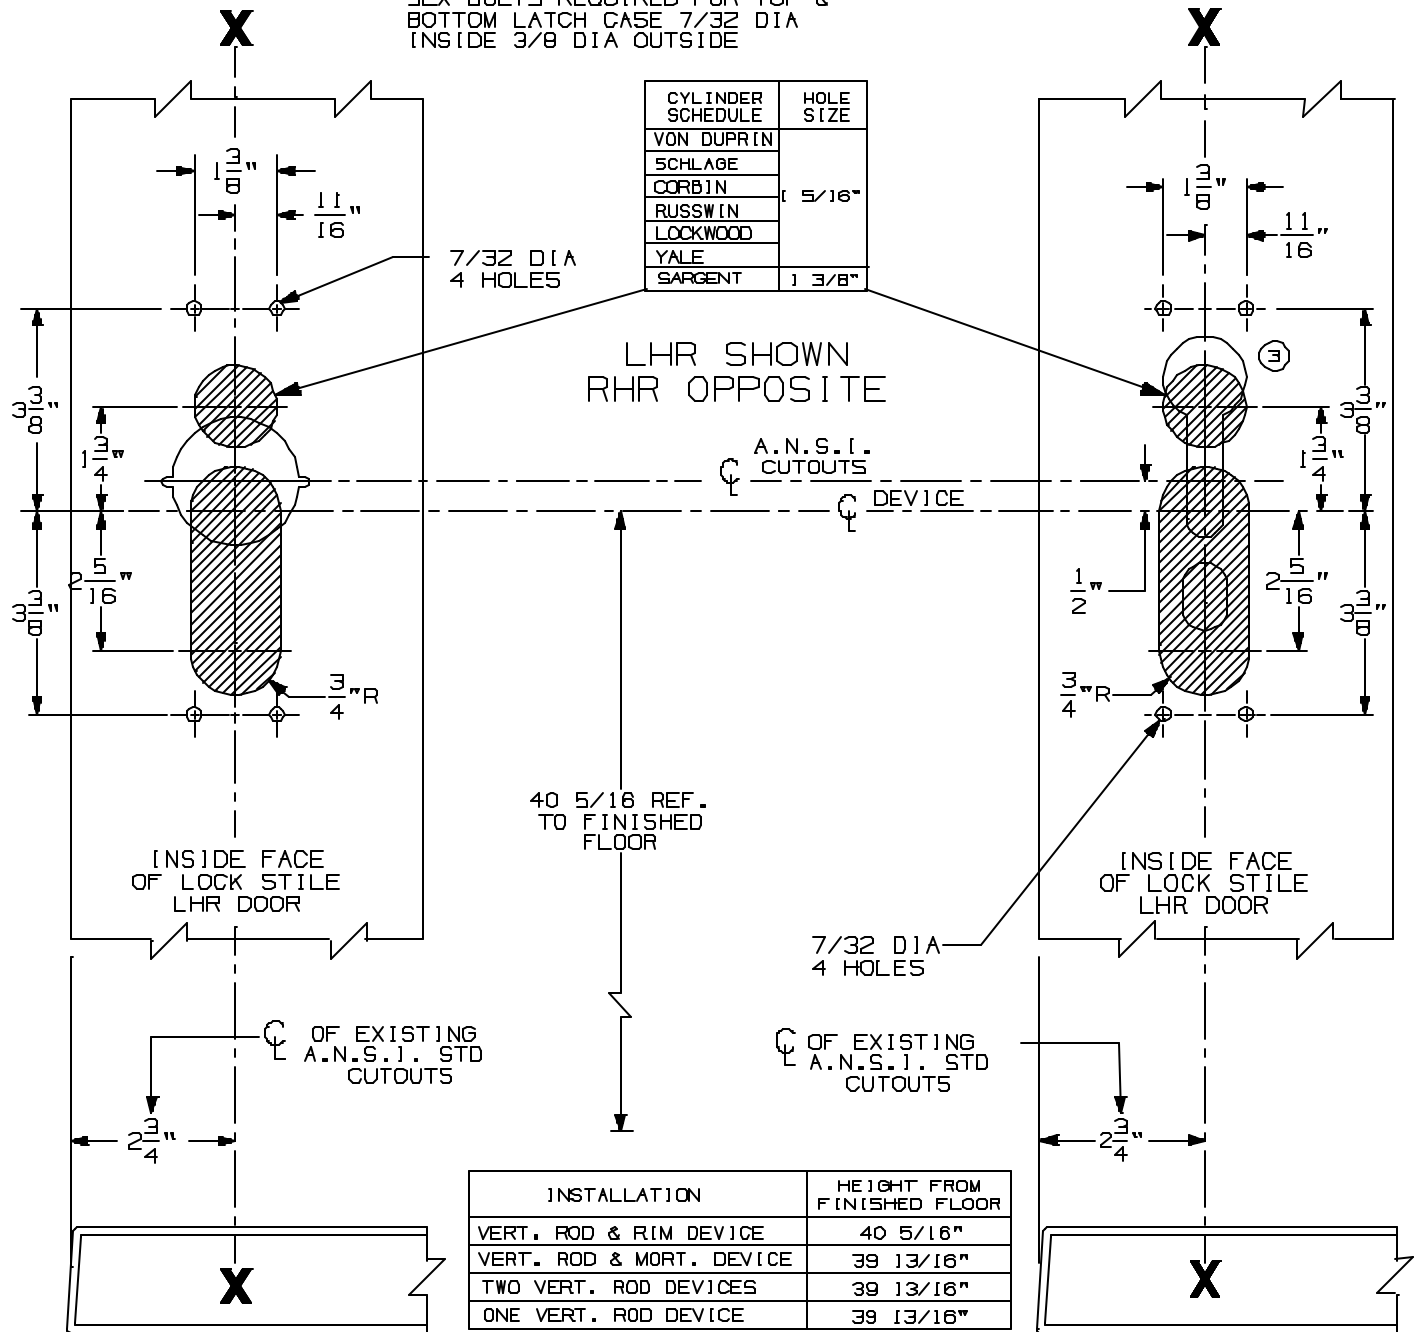

VON DUPRIN CUTOUTS ARE LOCATED FROM A.N.S.I. CUTOUTS
SEE A.N.S.I. SPECIFICATION NO. A115 FOR THE SIZE
AND LOCATION OF THESE CUTOUTS.

FOR OUTSIDE TRIM PREPARATION,
SEE ADDITIONAL TRIM TEMPLATE.

8827TP VERTICAL ROD DEVICE WITH 880 TRIM
FOR STOCK HOLLOW METAL APPLICATION



NOTE:

TEMPLATE NUMBER:

10200_3

DATE:
4-27-98